



# RF-555

**AP&S**  
MOTORREDUCTORES

Posibles aplicaciones:

Peso:




## Características

MODEL	OPERATING RANGE	VOLTAGE NOMINAL	NO LOAD		AT MAXIMUM EFFICIENCY					STALL			
			SPEED r/min	CURRENT A	SPEED r/min	CURRENT A	TORQUE mN-m	TORQUE g-cm	OUTPUT W	TORQUE mN-m	TORQUE g-cm	CURRENT A	
RS-540RH-6530	(*1)	3.6-6.0	6V CONSTANT	19200	1.30	15980	6.45	15.1	154	25.3	90.3	920	32.0
RS-540RH-7522	(*1)	3.6-4.8	4.8V CONSTANT	20200	1.90	16510	8.50	14.3	146	24.8	78.5	800	38.0
RS-540SH-7520	(*1)	4.8-7.2	7.2V CONSTANT	23400	2.40	19740	13.0	30.6	312	63.2	196	1998	70.0
RS-540SH-6527	(*1)	4.8-9.6	9.6V CONSTANT	23400	1.60	20040	9.55	31.0	316	64.9	216	2202	57.0

(\*1) CCW shifted commutation (CCW+)

The terminal position against the tapped holes varies depending on CW+/NEUTRAL.

## Dimensiones

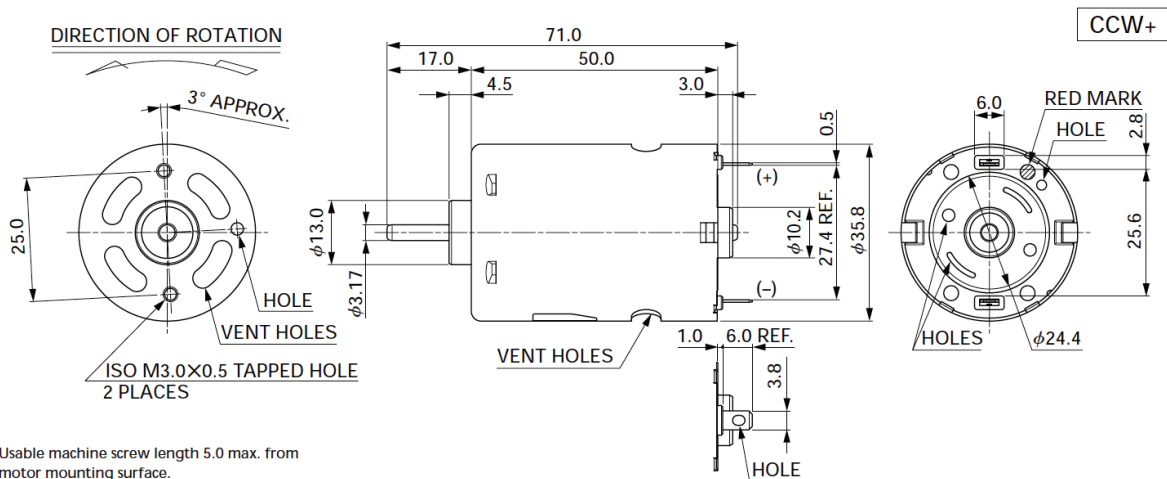

## Curva de funcionamiento

